


Ordering Snaplock® Seam



Thank you for choosing Snaplock®

To place your order please complete & then check the details entered to avoid any production errors.

Lead times vary from 2 -4 weeks, current lead times are confirmed at the time of ordering.
1 -2 weeks after placing the order more information about the delivery date will be made available.

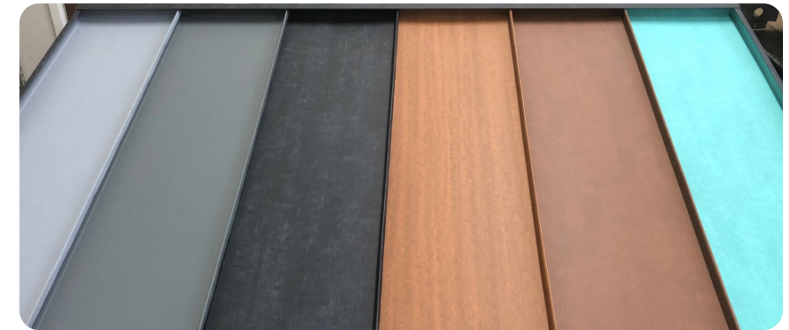

1 & 2- Panels & Flashings

- Preferred metal & finish
- 25mm or the 38mm profile type
- Panel lengths & quantities

3 - Roof Flashings

- Confirm dimensions & angles for any flashings added to page 1

4 - Wall Flashings

- Confirm dimensions & angles for any flashings added to page 2

5 - Custom Schedule

- Supply information for custom panels
- Supply information for custom flashings

6 - Accessories

- Panel Clips
- Flat Clips
- Screws
- Nails
- Underlay
- Sealant

7 - Customer Details

- Name & contact info.
- Billing address
- Delivery Address
- Address to send samples.

8 - Office Only



Snaplock® Seam Roof System



Select roof panel finish – lengths & quantities – profile type – roof pitch – roof flashings.

Aluminium

Zinc Patina	Dark Zinc Patina	Graphite	Anthracite	Copper Oxide	Copper Patina	Corten	Copper Metallic	Gold	Zinc Green	Zinc Blue	Zinc Red

Click to select metal finish - Multi select if requesting samples

Greencoat PLX Pural BT – Roofinox Stainless Steel – Aurubis Copper Nordic Standard

Nordic Night Black	Mountain Grey	Quarry Grey	Leaf Green	Metallic Gold	Stainless Steel	Copper

Click to select metal finish - Multi select if requesting samples

Select Profile Type & Roof Pitch

25mm x 425mm	38mm x 386mm	Roof Pitch °

Length mm	Quantity	Length mm	Quantity

25mm x 425mm Cover Width Suitable for a minimum roof pitch of 7 °	38mm x 386mm Cover Width Suitable for a minimum roof pitch of 3 °

Standard Roof Flashing Requirements

Flashing Type	Length mm	Quantity
Eaves		
Apex		
Ridge		
Abutment		

On Page 3

Alter the dimensions if required.

Add any missing dimensions or angles.

If other custom flashings or panels are required, add to pages 5

Flashing Type	Length mm	Quantity
Verge		
Valley		
Chase		
Seam Slider		

Snaplock® Seam Wall System



Select wall panel finish – lengths & quantities – profile type – wall flashings.

Aluminium

Zinc Patina	Dark Zinc Patina	Graphite	Anthracite	Copper Oxide	Copper Patina	Corten	Copper Metallic	Gold	Zinc Green	Zinc Blue	Zinc Red

Click to select metal finish - Multi select if requesting samples

Greencoat PLX Pural BT – Roofinox Stainless Steel – Aurubis Copper Nordic Standard

Nordic Night Black	Mountain Grey	Quarry Grey	Leaf Green	Metallic Gold	Stainless Steel	Copper

Click to select metal finish - Multi select if requesting samples

Select Wall Profile Type

25mm x 425mm	38mm x 386mm

Length mm	Quantity	Length mm	Quantity

25mm x 425mm Cover Width	38mm x 386mm Cover Width

Flashing Type	Length mm	Quantity
Ventilated Cill		
Cill		
Head		
Base 1		
Base 2		
Abutment		
Box Abutment		

Standard Wall Flashing Requirements

On Page 4


Alter the dimensions if required.

Add any missing dimensions or angles.

If other custom flashings or panels are required, add to page 5

Flashing Type	Length mm	Quantity
Reveal 1		
Reveal 2		
Reveal 3		
Internal Corner		
External Corner		
Coulisseau		

Snaplock® Seam Roof Flashings

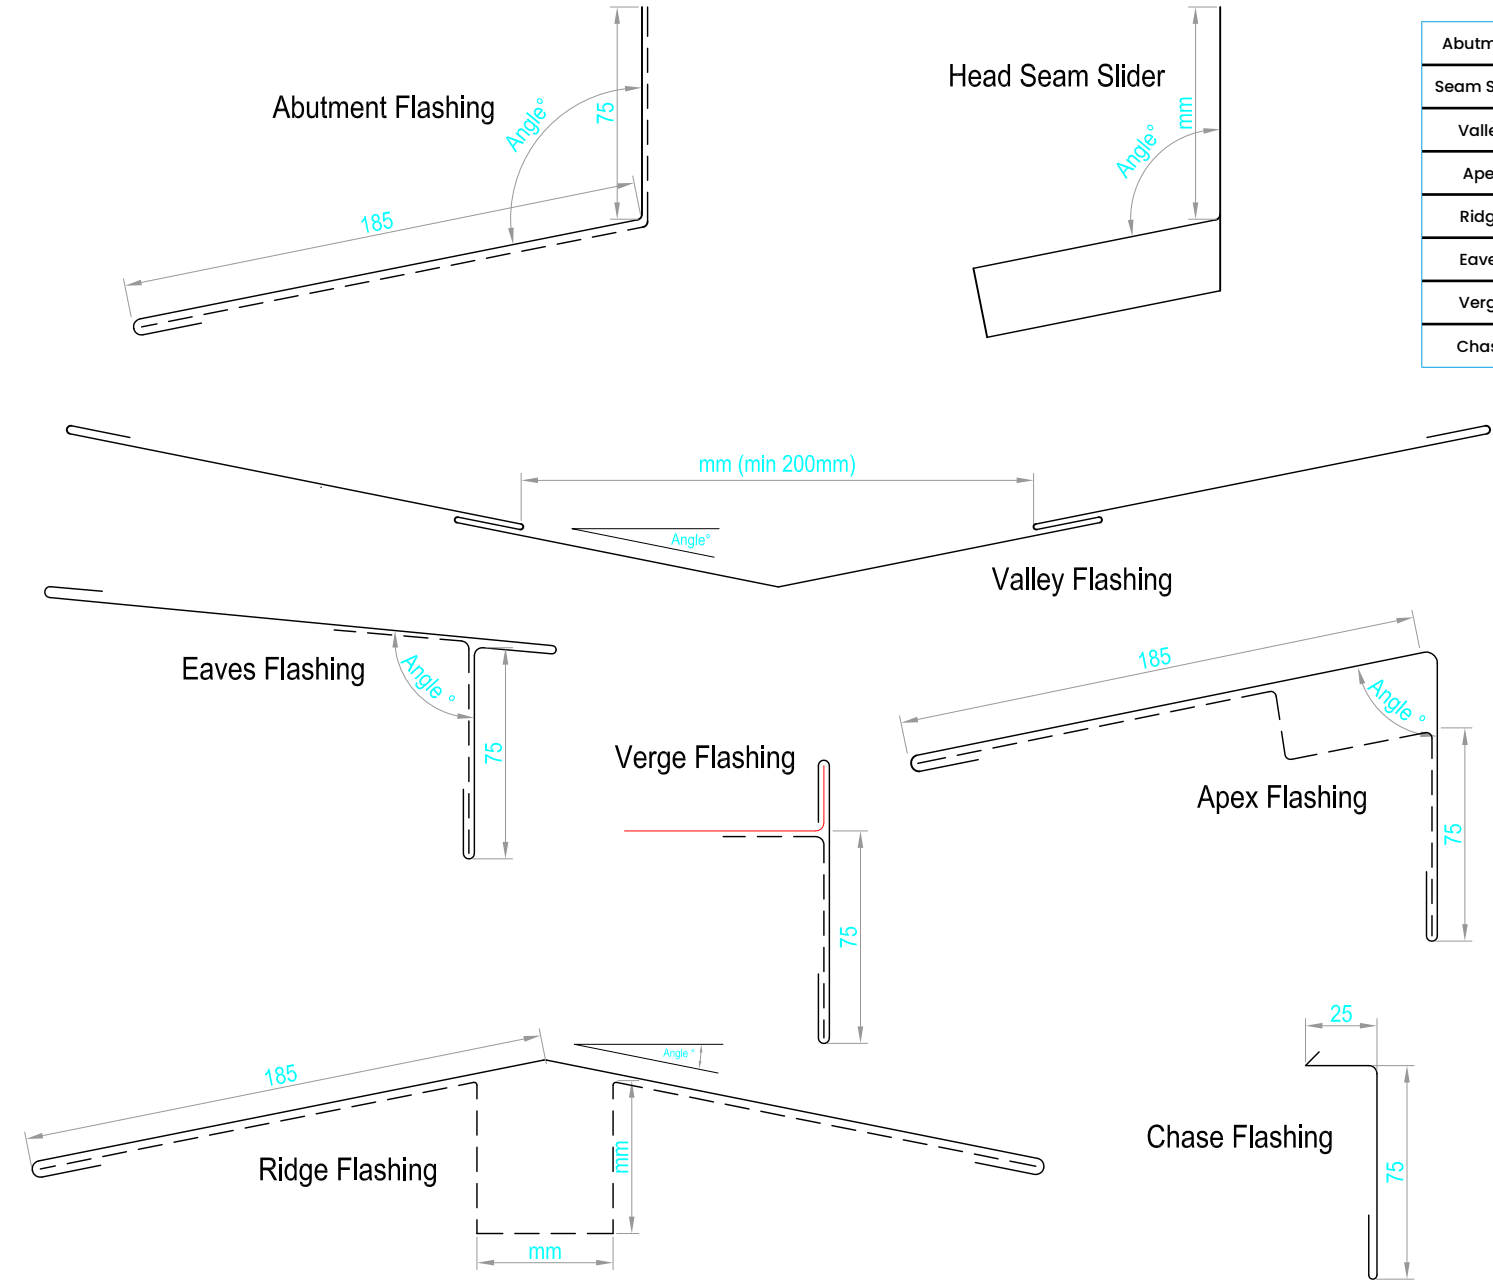


Abutment	Angle °		75mm		185mm	
Seam Slider	Angle °		mm ?			
Valley	Angle °		mm ?			
Apex	Angle °		75mm		185mm	
Ridge	Angle °		185mm		H	V
Eaves	Angle °		75mm			
Verge	Seam		75mm			
Chase	25mm		75mm			

Roof Flashings

- Eaves Flashing includes liner
- Verge Flashing includes liner
- Apex Flashing includes liner, buttstrap & foam filler
- Ridge Kit inc liner, buttstrap & foam filler
- Abutment Flashing includes liner, buttstrap & foam filler
- Please note. The ridge flashing shown is to suit a ridge beam. If you have a trussed roof click or tick the box below.

Snaplock® Seam Wall Flashings

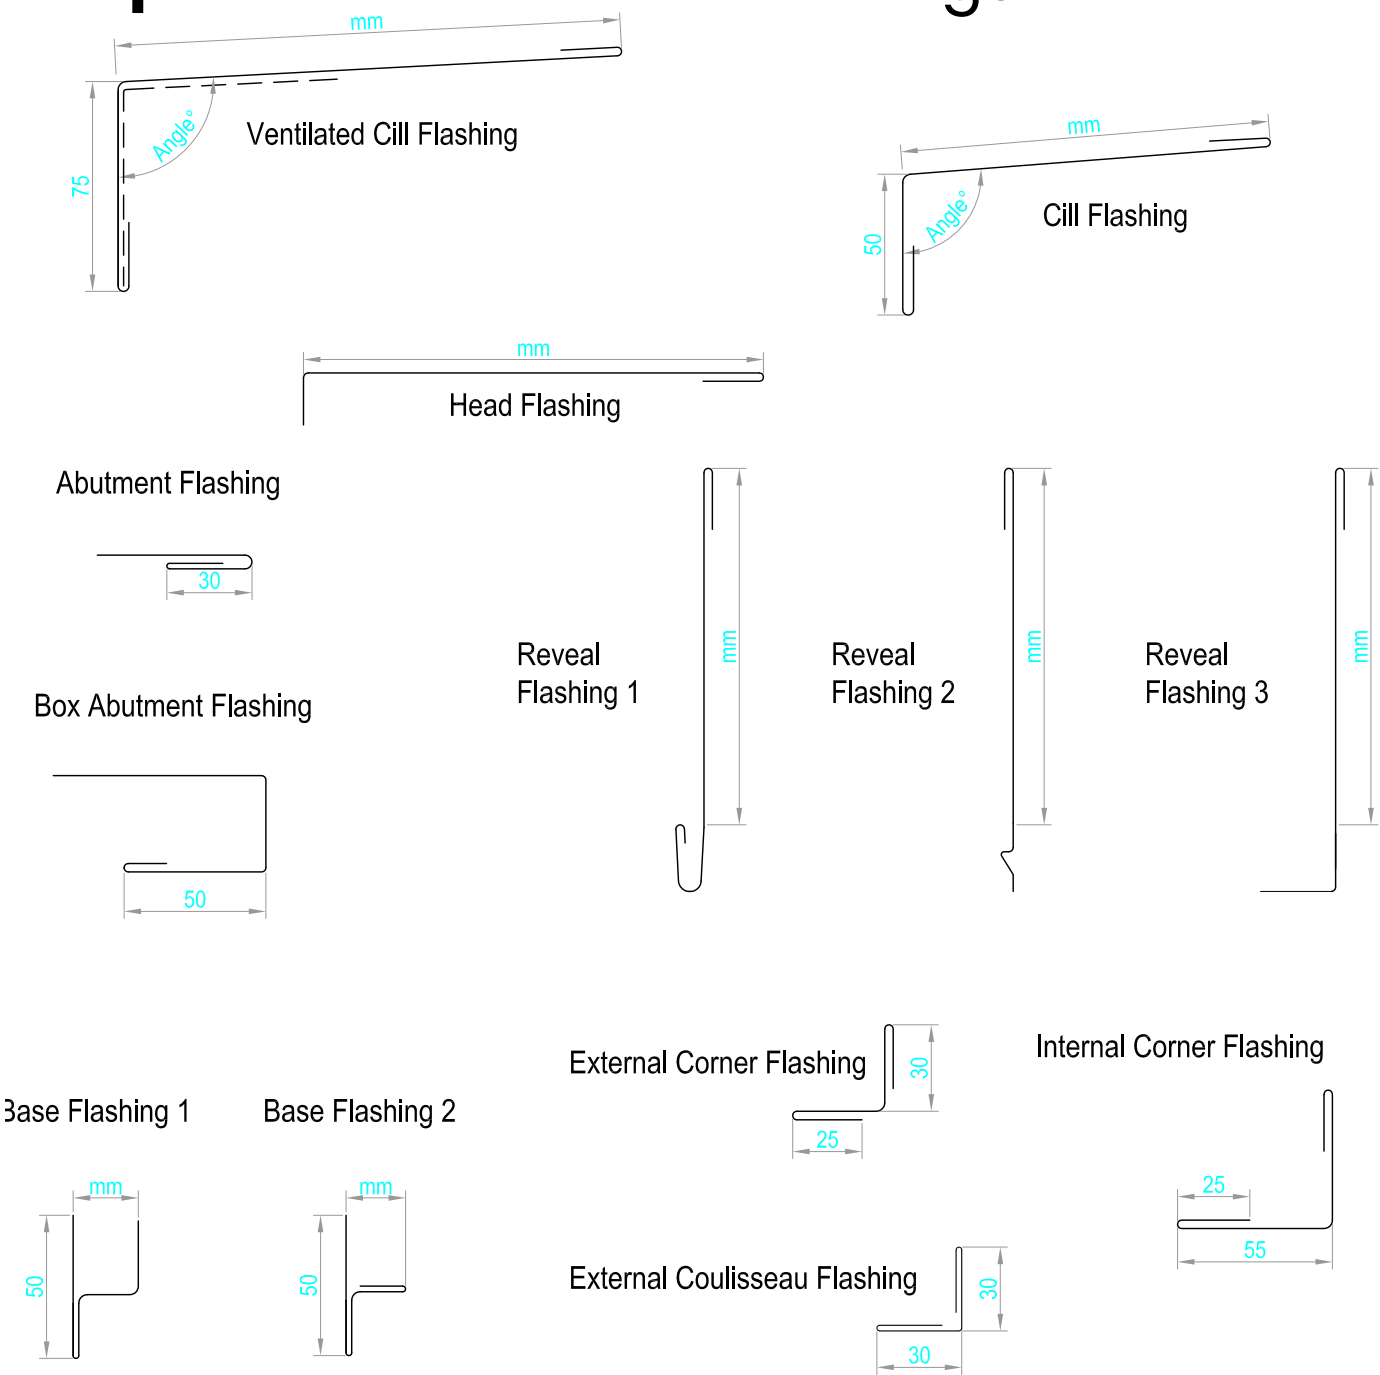

Vent-Cil	Angle °		75mm		mm?	
Cil	Angle °		50mm		mm?	
Head	mm?					
Abut	30mm					
Box-Abut	50mm					
Rev 1	mm?					
Rev 2	mm?					
Rev 3	mm?					
Base 1	50mm		mm?			
Base 2	50mm		mm?			
Int - Corner	25mm		55mm			
Ex -Corner	25mm		30mm			
Ex - Couliiss	30mm		30mm			

Wall Flashings

Standard Cill Flashing - depth of up to 150mm

Standard Ventilated Cill includes liner - up to 150mm

Standard Head / Reveal Flashings - up to 150mm

Snaplock® Seam Custom Schedule

[illegible]

Snaplock® Seam Accessories



Product Type	Amount	Quantity
25mm Clips	Box 400	
38mm Clips	Box 200	
Flat Clips	Box 300	
25mm Stainless Timber Screws	1000	
25mm Stainless Ringshank Nails	2500	
ISO-Mat Pro Breather Membrane	50m2 Roll	
ISO-Mat Metal Structured Underlay	30m2 Roll	
Snaplock® Seam Tool Kit	As shown	

Orders are supplied with enough clips and flat flashing clips to complete the installation.
If you require more add the quantity.

Indicate whether you require screws or nails.
Orders are supplied with enough screws or nails, if you require more add the quantity.

As standard orders are supplied with enough iso-mat pro breather membrane.
If you require more rolls add the quantity here.

Alternatively indicate a preference for ISO-Mat Metal Structured underlay

Indicate if the order should include the Snaplock® Seam Tool Kit as shown below.



Snaplock® Seam Customer Details



Name		Contact Number		Email	
------	--	----------------	--	-------	--

Company		Site Contact Number		Date Required	
---------	--	---------------------	--	---------------	--

Billing Address		Delivery Address		Samples Address	
Postcode		Postcode		Postcode	

Notes Regarding Delivery

Ordering Terms
After this form has been completed and a quotation produced and accepted a proforma invoice will be sent to the email address provided on this page.
Orders will be processed once funds have been received and will be delivered to the address entered on this page .
Lead times vary, an initial estimate is provided at the time of placing the order.
No refunds are given on bespoke products so ensure a metal sample has been received and confirmed as correct prior to making payment.
In the event a package arrives damaged, refuse the delivery and take photographic evidence.
If after taking delivery any items are found to be damaged, notify us within 24 hours and supply photographic evidence.
In such cases replacement items will be sent for items found to be damaged that were not damaged in transit.
All products leave the manufacturers fully inspected and in perfect condition.
The customer must notify the carrier of even the slightest trace of damage (holes, signs of crushing, etc.) To the delivery, and refuse the delivery if necessary.
No exchanges can be made at a later time for goods claiming to be damaged during carriage without notification at the time of reception.
As with any shipment, a delay or loss of goods is possible. In such a case, the carrier shall start an investigation.
Every effort is made, for as long as necessary, to find the delivery.
If the delivery is not found, the carrier will reimburse Merlin Metals, who will deliver a new, identical package to the customer free of charge.
Merlin Metals shall not be held responsible for delayed delivery times due to the carrier, including for the loss of goods, bad weather or strikes.
Merlin Metals will not be responsible for damage or loss of goods or part thereof in transit or for any discrepancy between the goods delivered and the goods ordered unless the customer gives written or emailed notice of a claim to Merlin Metals and the carrier within three (3) business days of delivery.
In the event of damage of goods or part thereof in transit or for any discrepancy between the goods delivered and the goods ordered, the customer must hold the goods and make them available for inspection or collection by Merlin Metals or its representatives on request.

Please tick to confirm the details entered are correct.



Order Number		Order Date		Setting Out Roof Drawings		Processed By	
Quote Sent		Proforma Sent		Setting Out Wall Drawings		Payment Received	
Lead Time							

Order Notes							

Snaplock® Seam Roof A Wall Flashing Details

